
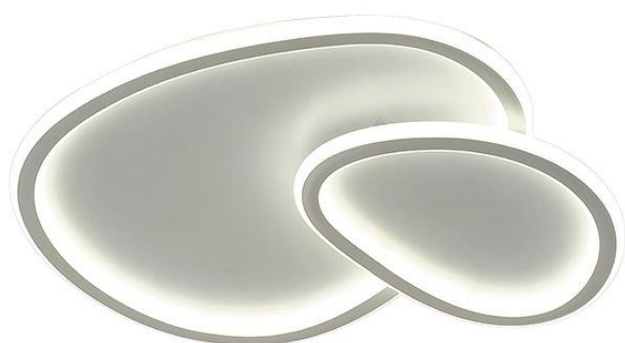


Product Data Sheet

INDOOR LIGHTING

RING 64 64W

CODE: 2026280

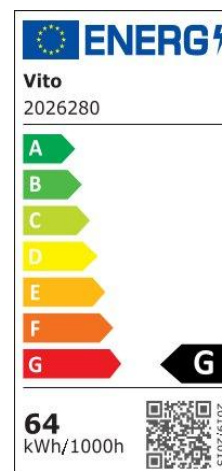

Area of application

Decorative LED Ceiling Fixture with 3xCCT function to be controlled by a DIP-switch. For surface and pendant installation in indoor decorative lighting applications. Ceilings of corridors and rooms in homes, hotels, shopping malls, commercial areas..

Product Advantages

RING 64 is a decorative ceiling fixture model with 3xCCT function with a DIP switch inside. equipped with backlit technology of SANAN LED sources. arrangement with 3 position switch for ranging the color temperature between 3000K, 4000K or 6000K.

Intended for surface installation. Housing of aluminum board electrostatically painted with sandblasted finishing in sand white. Difusser made by PVC.

Product Data Sheet

INDOOR LIGHTING

RING 64 64W

CODE: 2026280

Product Features


Electrical

Power (Watt): 64
Voltage: 180-265V AC ~ 50/60Hz
Power Factor: >0.95
Electrical Protection: Class I
Surge Protection: --
Dimmability: NO
Switch Cycle (Times): 30000

Material Characteristics

IP Class: IP20
IK Class: -
Material: Aluminium+Metal-Sheet Body + PVC Diffusor
Ambient Temperature: -20°C<ta<+40°C
Body Color: WHITE
Product Size (mm): 480x400xH70

Technical Drawing

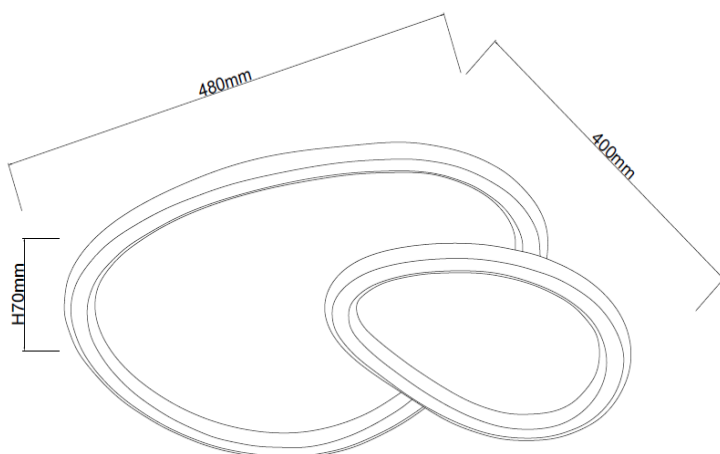


Lighting

Lumen (Lm): 3840
Luminaire efficacy (Lm/W): 60
Colour Temperature: 3CCT
Beam Angle: 120°
CRI: Ra >80
Lifetime (Hours): 30000
EEL : G

Packing Informations

Pieces/Outbox: 5
Outbox Size (mm): 670x470x555
Outbox G.W. (Kg): 13,5
Outbox Volume (m³): 0,1748
Unit Weight (Gr): 2700
Barcode : 6972538048622

Light Distribution Curve

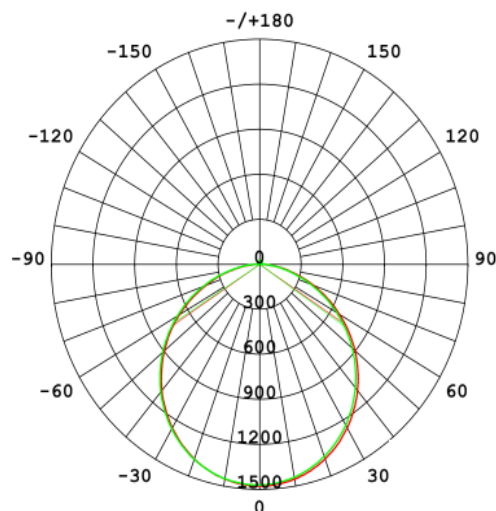

System Definition: VT/RING 64/480x400xH70/64W/3CCT-DIP/WHT

VITO EUROPE

102 Iztochna Tangenta str. 4th Floor

P.C. 1528, Sofia/Bulgaria

Phone: +359 2 4341575

E-mail: info@vitoeurope.com

www.vitolighting.com