

Product Data Sheet

INDOOR LIGHTING

FURNILUX 4W

CODE: 2028020



Vito
2028020



4
kWh/1000h



3CCT

Area of application

LED Spot to be used mainly for furniture lighting

LED
INSIDE

12VDC

IP44

CRI
Ra>80

20000h

x20000

Non Dimm

-20/+40°C

Product Advantages

FURNILUX is a compact indoor lighting solution designed for both functional and decorative applications in contemporary interior environments. With a power consumption of 4W and an IP44 protection rating, it is suitable for installation in areas where resistance to moisture is required, while still maintaining a clean, minimal, and discreet visual presence that integrates seamlessly into modern architectural designs. The fixture operates at 12V DC and is supplied with a 60cm connection cable, ensuring convenient installation and flexible positioning across a variety of furniture, shelving, or interior lighting configurations. In addition, FURNILUX can be connected to a central power hub (code 2028045), allowing multiple luminaires to be powered from a single source, resulting in a more organized, efficient, and scalable lighting system. Equipped with a practical 3CCT DIP switch, FURNILUX enables quick and easy selection between different color temperatures. Available in three elegant finishes, white, black, and matt nickel and designed in a clean round shape.

Product Data Sheet

INDOOR LIGHTING

FURNILUX 4W

CODE: 2028020

Product Features

Electrical

Power (Watt): 4
Voltage: 12VDC/12-24VAC
Power Factor: >0.5
Electrical Protection: Class III
Surge Protection: --
Dimmability: NO
Switch Cycle (Times): 25000

Material Characteristics

IP Class: IP44-Frontal
IK Class: -
Material: PP
Ambient Temperature: -10°C<ta<+40°C
Body Color: BLACK
Product Size (mm): Ø70*18

Technical Drawing





Lighting

Lumen (Lm): 75
Luminaire efficacy (Lm/W): 300
Colour Temperature: 3CCT(3000K/4000K/6500K)
Beam Angle: 120°
CRI: Ra >80
Lifetime (Hours); 25000
EEL : G

Packing Informations

Pieces/Outbox: 40
Outbox Size (mm): 330x170x180
Outbox G.W. (Kg): 2,8
Outbox Volume (m³): 0,010098
Unit Weight (Gr): 70
Barcode : 6977231357552

Light Distribution Curve

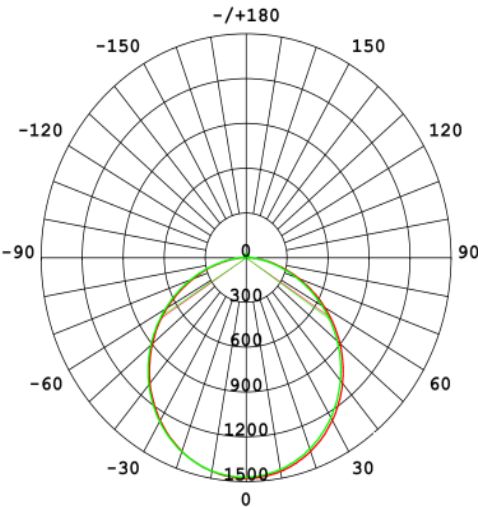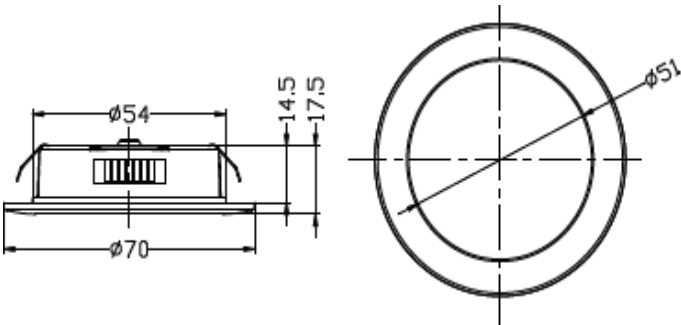

System Definition: VT/FURNILUX/4W/3CCT/Ø55MM-CUT/BLACK/12V/IP44/PLASTIC/60CM CABLE/FURNITURE SPOT