


TECHNICAL DATASHEET

PROFILED-PCM WHITE Ø90CM 72W

03-07-2020

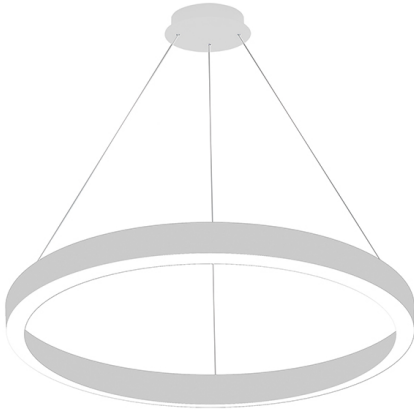

RLT/PROFILED-PCm/ PENDANT/Ø90 H8CM/WHT-B/OP-D/65K

NOTES

Turkey
Discover
the potential

General Informations

| | |
|---------------|------------------|
| Stock Code | 2423870 |
| HSC/GTIP Code | 9405.10.98.50.00 |

Lighting Characteristics

| | |
|-----------------------|--------------|
| Luminous Flux | 6348 lumen |
| Time for 60% of Lumen | <0.5 seconds |
| Light Beam Angle | 160° |
| Flicker | No |
| LED Type | SMD |

Electrical Characteristics

| | |
|-----------------------------|----------------|
| Current Type | AC |
| Operation Voltage | 220-240 Volt |
| Operation Frequency | 50/60 Hertz |
| Power | 46 Watt |
| Power Factor | >0.9 |
| Luminous Efficiency | 138 lumen/Watt |
| Energy Savings | 0,87 |
| Dimmable | No |
| Electrical Protection Class | Class I |

Mechanical Parameters

| | |
|--------------------------|---|
| IP Protection Class | IP20 |
| Switch On/Off Cycle | 30000 |
| Lifetime | 50000 hours |
| Body Material | Aluminum |
| Body Colour | White |
| Diffuser Material | PC Opal Diffuser with High Permeability |
| Product Height | 80 millimeter |
| Product Width | Ø900 millimeter |
| Product Depth | 80 millimeter |
| Ambient Temperature (Ta) | -20°C<Ta<40°C |

Electrical Component Specifications

| | |
|------------------------|-----------------|
| Component Fitting Type | Internal Driver |
| Driver Properties | Isolated IC |
| Driver Input Voltage | 220-240 Volt |

IMPORTANT NOTES: VITO reserves the right to change/remove models or specifications partially/completely without any notice. Information, models and photographs of the products in this technical datasheet can not be used, reproduced or republished without permission. However, some parts can be quoted by giving reference and/or chapter number belonging to technical datasheet. Most of the items in the datasheet have been designed by our company within indicated technical specifications inside. Our company is not responsible for errors caused by wrong installation and operating against rules according to qualifications specified in the product details. Photographs printed in this datasheet may not reflect the actual color of the product depending on printing conditions. In the same context, typographical errors may possibly be found in the texts.