


# Product Data Sheet

## INDOOR LIGHTING

TETRIS 2 RL1 9W

CODE: 2428900

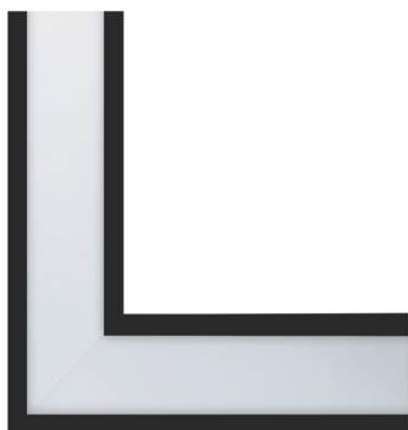

### Area of application

Recessed-Mounted Linear LED lighting fixture to be installed on ceilings of corridors/rooms of homes, shopping malls, commercial areas, offices, schools, hospitals, industrial areas..

### Product Advantages

TETRIS 2 RL1 - Corner Connector for PROFILED series LED LINEAR LIGHTING is with Aluminum body and Polycarbonate High Permeability Opal Diffuser presents 900Lm lighting performance and 50000Hours long lifetime. This 9W model includes 3000K (WARM WHITE) LED for 120° light beam-angle as desired lighting flexibility. It's ready to be operated with its easy installation and maintenance. TETRIS RL1 series led linear fixtures are made by SAMSUNG chips and PHILIPS or TRIDONIC driver. There is option to be dimmable 220V, 0-10V, DALI, upon specific request.

# Product Data Sheet

INDOOR LIGHTING

TETRIS 2 RL1 9W

CODE: 2428900

## Product Features

### Electrical

Power (Watt): 9

Voltage: 220-240V AC ~ 50/60Hz

Power Factor: >0.9

Electrical Protection: Class I

Surge Protection: --

Dimmability: NO

Switch Cycle (Times): 30000

### Material Characteristics

IP Class: IP20

IK Class: -

Material: Aluminum

Ambient Temperature: -20°C<ta<+40°C

Body Color: BLACK

Product Size (mm): 25x25x6,5

### Technical Drawing

### Lighting

Lumen (Lm): 900

Luminaire efficacy (Lm/W): 100

Colour Temperature: 3000K (WARM WHITE)

Beam Angle: 120°

CRI: Ra >80

Lifetime (Hours); 50000

EEL : E

### Packing Informations

Pieces/Outbox: 1

Outbox Size (mm): 95x300x380

Outbox G.W. (Kg): 1,14

Outbox Volume (m<sup>3</sup>): 0,0108

Unit Weight (Gr): 1140

Barcode : 8698553618852

### Light Distribution Curve

System Definition: TETRIS RL-L/REC/30K/BLC/9W/900LM/25X25X6,5CM

VITO EUROPE

102 Iztochna Tangenta str. 4th Floor

P.C. 1528, Sofia/Bulgaria

Phone: +359 2 4341575

E-mail: [info@vitoeuropa.com](mailto:info@vitoeuropa.com)

[www.vitolighting.com](http://www.vitolighting.com)