


Product Data Sheet

INDOOR LIGHTING

TETRIS 2 SL1 9W

CODE: 2429030

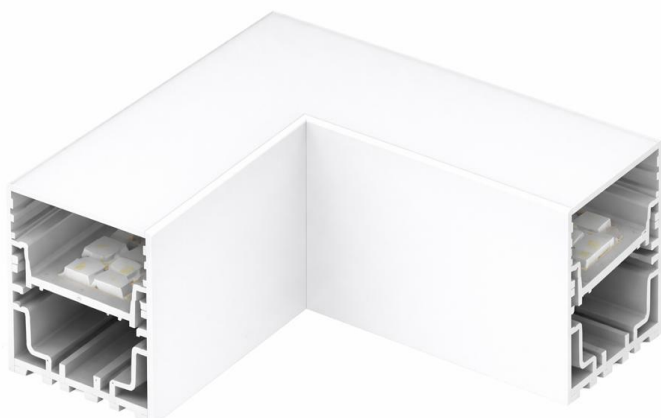

Area of application

Surface-Mounted or Pendant-Mounted Linear LED lighting fixture to be installed on ceilings of corridors/rooms of homes, shopping malls, commercial areas, offices, schools, hospitals, industrial areas..

Product Advantages

TETRIS 2 SL1 - Corner Connector for PROFILED series LED LINEAR LIGHTING is with Aluminum body and Polycarbonate High Permeability Opal Diffuser presents 945Lm lighting performance and 50000Hours long lifetime. This 9W model includes 4000K (NATURAL WHITE) LED for 120° light beam-angle as desired lighting flexibility. It's ready to be operated with its easy installation and maintenance. TETRIS SL1 series led linear fixtures are made by SAMSUNG chips and PHILIPS or TRIDONIC driver. There is option to be dimmable 220V, 0-10V, DALI, upon specific request.

Product Data Sheet

INDOOR LIGHTING

TETRIS 2 SL1 9W

CODE: 2429030

Product Features


Electrical

Power (Watt): 9
Voltage: 220-240V AC ~ 50/60Hz
Power Factor: >0.9
Electrical Protection: Class I
Surge Protection: --
Dimmability: NO
Switch Cycle (Times): 30000

Material Characteristics

IP Class: IP20
IK Class: -
Material: Aluminum
Ambient Temperature: -20°C<ta<+40°C
Body Color: WHITE
Product Size (mm): 50x80x250x250

Technical Drawing

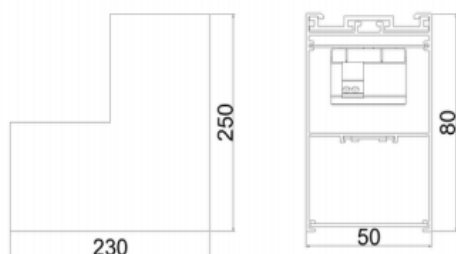


Lighting

Lumen (Lm): 945
Luminaire efficacy (Lm/W): 105
Colour Temperature: 4000K (NATURAL WHITE)
Beam Angle: 120°
CRI: Ra >80
Lifetime (Hours): 50000
EEL : E

Packing Informations

Pieces/Outbox: 1
Outbox Size (mm): 95x300x380
Outbox G.W. (Kg): 1,14
Outbox Volume (m³): 0,0108
Unit Weight (Gr): 1140
Barcode : 8698553618982

Light Distribution Curve

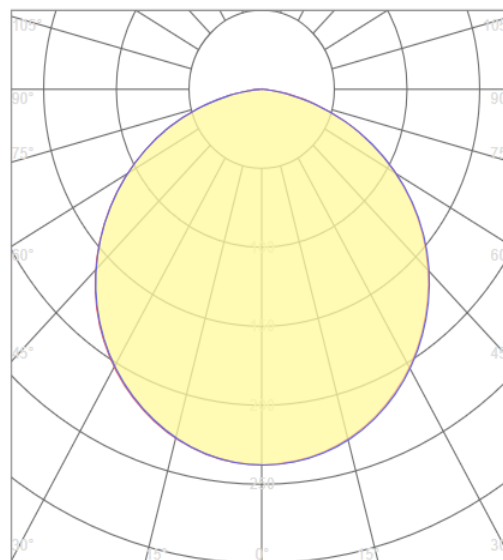

System Definition: TETRIS SL-L/SUR/40K/WHT/9W/945LM/5X8X25X25CM

VITO EUROPE
102 Iztochna Tangenta str. 4th Floor
P.C. 1528, Sofia/Bulgaria
Phone: +359 2 4341575
E-mail: info@vitoeuropa.com

www.vitolighting.com