


Product Data Sheet

OUTDOOR LIGHTING

GIRAFFE 200W

CODE: 3104560

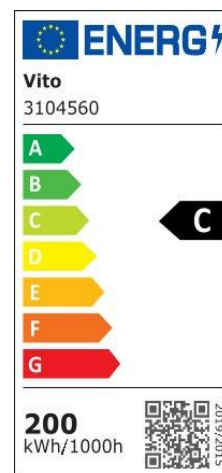

Area of application

LED STREET LAMP with SURGE PROTECTION
Parks, Gardens, Streets, Avenues, Loading Areas,
Highways

Product Advantages

GIRAFFE is a high lumens led street light luminaire with adjustable tilt angle, 0-90°. The luminaire is equipped with LUMILEDS LED modules. Can be installed on mounting arm with Internal diameter max. $\Phi 60$ mm. Housing of die-cast aluminum, elec-trostatically painted in Anthracite color (RAL 7024). Optical system with anti UV treatment polycarbonate diffuser. Constant current waterproof LED driver. Surge protection device (4 kV) included. Connection cable 3x0.75 mm² with a length of 0,3m.

VITO EUROPE
102 Iztochna Tangenta str. 4th Floor
P.C. 1528, Sofia/Bulgaria
Phone: +359 2 4341575
E-mail: info@vitoeurope.com

www.vitolighting.com

Product Data Sheet

OUTDOOR LIGHTING

GIRAFFE 200W

CODE: 3104560

Product Features


Electrical

Power (Watt): 200
Voltage: 100-240V AC ~ 50/60Hz
Power Factor: >0.9
Electrical Protection: Class I
Surge Protection: 10kV
Dimmability: NO
Switch Cycle (Times): 50000

Material Characteristics

IP Class: IP65
IK Class: IK08
Material: Aluminum
Ambient Temperature: -20°C<ta<+60°C
Body Color: RAL 7024
Product Size (mm): 275x738x76

Technical Drawing

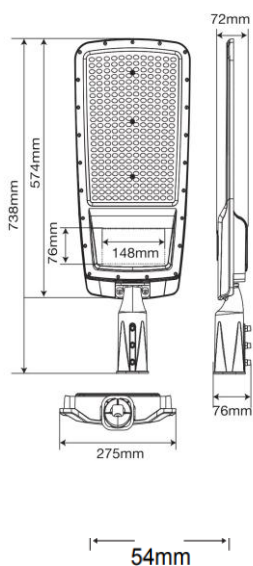


Lighting

Lumen (Lm): 30000
Luminaire efficacy (Lm/W): 150
Colour Temperature: 4000K (NATURAL WHITE)
Beam Angle: 75°x130°
CRI: Ra >70
Lifetime (Hours): 50000
EEL : C

Packing Informations

Pieces/Outbox: 10
Outbox Size (mm): 760x415x300
Outbox G.W. (Kg): 18,39
Outbox Volume (m³): 0,0946
Unit Weight (Gr): 1839
Barcode : 6977231350126

Light Distribution Curve

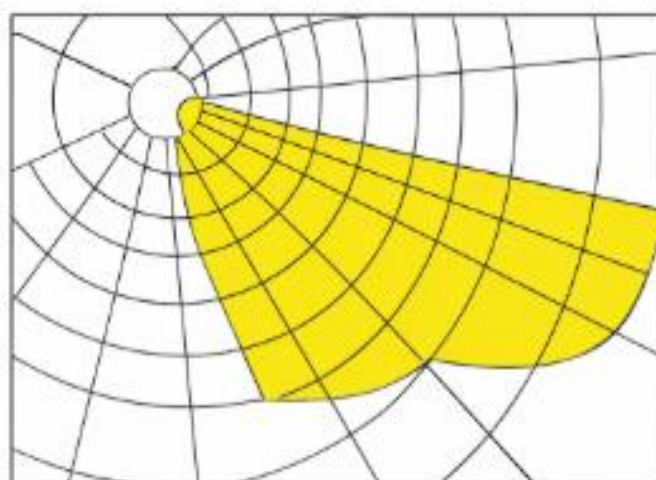

75x130°

System Definition: VT/GIRAFFE/200W/SMD/4000K/IP65/LED STREET LAMP

VITO EUROPE

102 Iztochna Tangenta str. 4th Floor

P.C. 1528, Sofia/Bulgaria

Phone: +359 2 4341575

E-mail: info@vitoeurope.com

www.vitolighting.com